


1.6" square

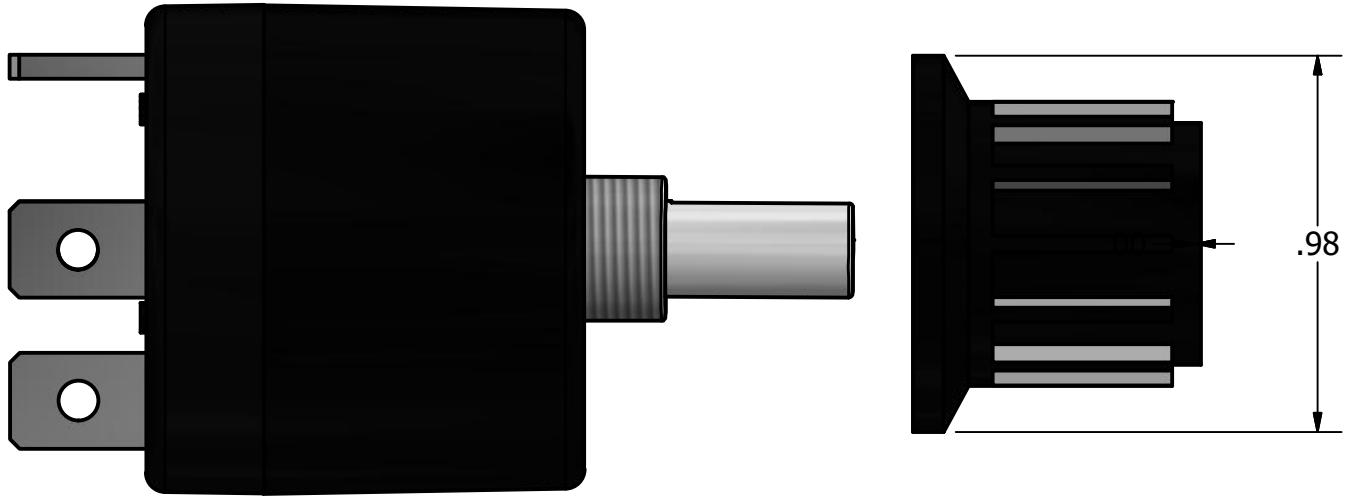


PARTS LIST	
1	MaxPulse w/ring lugs
1	Optional Installation Instructions
4	Color Coded Ring terminals
1	Optional reference panel label
1	Optional Placard
1	Optional STC Printout for logs
1	Optional Installatin Template
1	Knob
4	6-32 screws, lock washers for terminals
2	Allen Wrenches
1	9.52 x 32TPI bushing nut

SPECIFICATIONS	
STC/PMA	SA01861SE/PQ2574NM
DO-160E Testing	SEC. 21: RFE (EMI)
Voltage Range	12 to 35 VDC
Maximum Current	10 A per Channel
Output Channels	2
Internal Temp Protected	+85 degrees C
Enclosure Material	Bayer FR110 Resin meets UL94
Weight	1 ounce (28g)
Warranty	One Year Limited
Storage Temperature	-40C to +100C
Operating Temperture	-30C to +85C
Internal Temp	+25 C at 10 A

DIMENSIONAL TOLERANCES		
Fractions	Decimals inch	Angles
+/- 1/32	.XX +/- .08	+/- 1 degree
	.XXX +/- .010	
	X +/- .1	

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
All	A	Initial	3/3/2013	JB

DRAWN JB 3/10/2017 CHECKED JC 8/6/2013 QA	MFG JB 3/2/2013 APPROVED JB 3/2/2013	 Seaton Engineering TITLE 9200-000-B with ring terminals
SIZE B	DWG NO 9200-000-B	REV A
SCALE 2 : 1	SHEET 1 OF 1	